Honey extraction

TECHNICAL SCHEDULE ABOUT THE HONEY EXTRACTOR

Inox-steel container AISI 304, tig welded, conical bottom. Support ring and support for the legs in inox-steel. Chromatic-steel basket's and transmission's tree. Bronze basket tree' support with steel marble.

Baskets for honeycombs made by inox-steel or nylons with glass' fiber. Inox-steel joinable legs.

Transparent polycarbonate caps.

Inox-steel screw, gauges for blocking the legs excluded. Inox-steel crossbeam with Journal box for teflon tree. Mechanism box, crank handle' support, hinges for caps, sink/ faucet, they all are made with nylon with glass' fiber.

Steel mechanisms with movement and brake freewheeling system.

For the 2008 series.

Inox steel tig welded rectangular container. Rectangular inox-steel legs, height for 2008 series. Inox-steel for operculum.


Security block at the openable cap



Control board



Elecrtonic control with controls Membrane's controls for professional honey extractor.

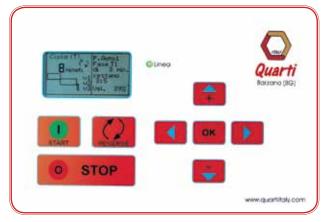

Quarti's new introduced in 2004.

It has resolved many problems in the beekeeping field, problems that come from the use of electrical machineries with jutting out buttons, which were touched by dirty hands and for this reason, they are usually blocked. The membrane's command has not any jutting out buttons. It is enough push on the program you have chosen in order to make it works. Assembled on the honey extractors, it has 4 base programs, which are able to extract the honey as best it can.

The menu has many different programs that could be modify:

- Variation of speed / deceleration
- Variation time and its speed, for singular phase: beginning intermediate - final
- Repetition of the cycle
- Inversion of the rotating sense of the basket
- Planning of the duration of the total cycle

The LCD display sees in every moment the different working phases. It advises you the opening of the cap, the rest of the time during the process, the speed in percentage, and the rotating sense and possible other alarms. This membrane's control, thanks to its versatility and simplicity is used on mixers, centrifuges for operculums, corkers, label machines, refilling processing and dosers, make the product unique in the honey-field.

Round professional 2013 series



Honey extractors "round series"

Code	Honeycomb's number	D. Blatt	Langstroth	Layens	Radial	Tangential	Reversible	Supplementary cages	Nylon basket	Inox-steel basket	Manual	Optional engine S122 100 W	Optional engine S86 110 W	Digital commands. prof. 370 W	Digital commands. prof. 750 W	Digital comma <mark>nds</mark> . prof. 1500 W	Ø Container	Ø Drain *	H. Drain	
S14I	4M - 2N	*	*		7	*			7	*	*		H				370	40	250	
S29I	4M - 2N	*	*		1	*				*	*	4	5				370	40	20	
S19I	3		*			*			4	*	*	1					370	40	50	
S112	3**					*				*	*	*					390	40	250	NEW
S28I	3		*			*				*	*		V				370	40	20	
S31	2		*	*		*	-		To the same	*	*	*					470	40	20	
S13	6M - 3N	*	*	*		*				*	*	*					525	40	250	
S15B	4		*			*				*	*	*	Ü.				525	40	250	
S18B	4		*				*			*	*	*	*				700	50	250	NEW
S20I	8M - 4N	*		*		*				*	*	*	*				620	40	250	
S24	6		*			*				*	*	*	*				620	40	250	
S81	6		*				*			*	*	*	*				700	50	250	NEW
S82	6		*				*			*				*			700	50	250	NEW
S05	9M - 3N	*			*	*		G08		*	*	*	*				525	40	250	
S05M	9M - 3N	*			*	*		G06	*		*	*	*				525	40	250	
S83H	12M - 6N	*	*	*			*		- 3	*			*				900	50	250	
S83P	12M - 6N	*	*	*			*		1	*				*			900	50	250	
S06X	18M - 9	*	*		*					*	*	*	*				620	40	250	NEW
S16	12		*		*	*		G06X		*	*		*				620	40	250	
S06	18M - 3N	*			*	*		G08		*	*		*				620	40	250	
S6B	18M - 3N	*			*	*		G06	*		*		*				620	40	250	
S66	18M - 3N	*			*	*		G06	4	*	-			*			620	40	250	
S84	24M - 12N - 12	*	*	*			*			*					*		1300	80	250	
S107	27M - 3N - 15	*	*		*	*		G06X		*	*	911	*				700	50	250	NEW
S91	27M - 3N - 15	*	*		*	*		G06X						*			700	50	250	NEW
S85	30M - 15N - 15	*	*	*			*			*		10				*	1600	80	250	
S37	32M - 4N	*			*					*				*			750	50	250	NEW
S17I	45M - 20N	*			*					*					*		920	50	250	NEW
S34	60M - 30N	*			*					*						*	1300	80	250	
S55	73M - 40N	*			*					*						*	1600	80	250	

DIMENSIONS - mm -

	DADAMBLATT HONEYCOMBS (M-N)
	LANGSTROTH HONEYCOMBS 485 X 235
	LAYENS HONEYCOMBS 400 X 365 (N)

N: NEST 470x300

M: SHALLOW BOX 470x150

*: INOX/CHROMAT STEEL 50 mm (NOT INCLUDED)

**: BASKET'S DIMENSIONS 270x440

Honey extractors "2008 series"

Code	Honeycomb's number	D. Blatt	Langstroth	Layens	Radial	Tangential	Reversible	Supplementary cages	Nylon basket	Inox-steel basket	Manual	Optional engine S122 100 W	Optional engine S86 110 W	Digital commands. prof. 370 W	Digital commands. prof. 750 W	Digital commands. prof. 1500 W	Length	Width	Height	Optional uncapping machine	Centrifuge	Ripening's tank
S95	2N - 4M	*	*			*			13	*	*	0					1250	470	800			
S96	3		*		- 34	*				*	*	0					1250	470	800			
S97	6M - 3N	*	*	*		*	1			*	*	0	000		8	7	1250	600	800	D25		
S98	4		*			*			1	*	*	0	- 1				1250	600	800	D25		
S104	6		*			1	*			*			Series				1500	750	800	D25		
S90	6			*			*			*				*	1	1/	1500	750	800	D25		
S99	9M - 3N	*			*	*		G06		*	*	0		1			1250	600	800	D25		
S100	9M - 3M	*			*	*		G06	*		*	0	17				1250	600	800	D25		
S103	27M - 3N - 15	*	*		*	*	io.	G06X		*	- 8		Series			4	1500	750	800	D25		
S89	27M - 3N - 15	*	*		*	*		G06X		*				*			1500	750	800	D25		
S108	32M - 4N	*			*	*		G06X		*	70			*			2000	750	850	D20		
S114	32M - 4N	*			*			G06X		*	1				*		2000	750	850	Series	*	
S101	45M - 20N	*			*					*					*		2200	1400	900	D20	*	
S102	45M - 20N	*			*					*					*		2200	1400	900	Series	*	*

Honey extractors "kit"

Code	Honeycomb's number	D. Blatt	Langstroth	Layens	Radial	Tangential	Supplementary cages	Nylon basket	Inox-steel basket	Manual	Optional engine S122 100 W	Optional engine S86 110 W	Honey filter "all diameter"	Ripener whose kg capability is	Container Ø	Exhaust pipe Ø	
\$53	2N - 4M	*	*			*			*	*			*	60	370	40	
S54	3		*			*			*	*			*	60	370	40	
S52	4		*			*			*	*	0		*	90	470	40	
S109	8M - 4N	*		*		*			*	*	0	0	*	110	620	40	
S51	9M	*			*				*	*	0	0	*	90	470	40	
S110	18M - 3N	*			*	*	G08		*	*	0	0	*	110	620	40	NEW
S111	18M - 3N	*			*	*	G06	*		*	0	0	*	110	620	40	NEW
S117	6		*			*		*		*	0	0	*	110	620	40	NEW
S123	12		*		*				*	*	0	0	*	110	620	40	NEW



HONEY EXTRACTORS 2008 SERIES

from 2008 It is a new series of machineries that are projected only to extract monoblock- honey, in only one machine we have all the things we should need in a honey-extractor's room: uncapping, operculum's treatment, the uncapped honeycombs' amount, the honey extraction and the honey's ripening. The most important advantages are: less encumbrance, practicality during the working process, better results, less falling in drops of the honey on the floor. "2008 series" is produced in many versions, from the hobbyist beekeeper to the professional. The model "2008/45 professional series" is the top of our product and it is supplied with: a big desk to uncap, it is included a uncapping machine with automatic drain of the honeycombs and with accumulator, electronic centrifuge foe operculum, a container for the un capped frames, an extractor of 45 honeycombs D.B. from a shallow box or 20 honeycombs from a nest commanded by a sophisticated software that is able to manage independently the extraction cycle, a ripening tank with filter that can be heathen, preset of a pump for the honey' transportation to the containers.



ADJUSTABLE AND SMONTABLE LEGS IN HEIGH




ADJUSTABLE AND SMONTABLE LEGS IN HEIGHT

COD. DESCRIPTION

- **\$95** Honey extractor 2008 2/4 series TANGENTIAL for 2 honycombs of nest D.B. or 4 honeycombs oh shallow box D.B. with manual transmission **C** €
- Honey extractor 2008-3 series TANGENTIAL for 3 honeycombs LANGSTROTH manual transmission C €

support for the uncapping's honeycomb

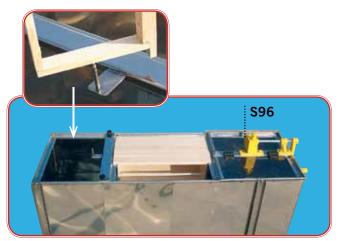

Support for the uncapping's honeycomb



- Honeycombs 208-3/6 series TANGENTIAL for 3 honeycombs of the nest D.B. or 6 honeycombs of the shallow box D.B. with manual transmission $C \in$
- Honeycombs 2008 -9/3 series radial with inox-steel basket for 9 honeycombs OF THE SHALLOW BOX d.b. OR 3 HONEYCOMBS OF The shallow box D.B. with the use of a supplementary cage excluded (serie crom. G06), with manual transmission C €
- \$100 Honey extractor 2008-9/3 radial with nylons basket for 9 honeycombs of the shallow box D.B or 3 honeycombs of shallow box with the use of a supplementary cage excluded (inox G06 series), with manual transmission $\boldsymbol{\zeta} \in$
- Honey extractor 2008 4 tangential for 4 honeycombs LANGSTROTH with manual transmission





support for the Uncapping's honeycomb







\$103 Honey extractor 2008 - 27/3 series radial for 27 honeycombs of the shallowbox or 3 tangential honeycombs of the nest (ith the use of supplementary cage included) or 15 langstroth honeycombs - with engine ART. S86 of 120W - 230 volt

S104

\$104 Honey extractor 2008 series - 6 reversible of 6 honeycombs LANGSTROTH with engine ART. S86 OF 120W- 230 volt





COD. DESCRIPTION

S89 Honey extractor 2008/ - 27/3 series - radial for 27 honeycombs of the shallow box or 3 tangential honeycombs of the nest (with the use of supplementary cage included) or 15 langstroth honeycombs, Kw 0,37 - 230 Volt, with electronic planner

S90 Honey extractor 2008 - 6 reversible of 6 honeycombs LANGSTROTH Kw 0,37 - 230 Volt, with electric planner




2008 series

> Ripening tanck flows in inox-steel screws, in this way, the cleaning is easier. The sloping bottom and the catch basin at the end of the tank, make easier fish the honey. Connection "garolla" pump of 50 mm. Optional: preheated filtering grill.

\$101 Ripener 2008 45/20 series radial for 45 honeycombs from the shallow box or 20 honeycombs from the nest - with electronic planner, Kw 0, 75 - 230 Volt



- s108 HONEY EXTRACTOR 2008 32/4 series radial for 32 honeycombs of the shallow box or 4 honeycombs of the nest, electric planner Kw 0,37 -230 Volt
- \$114 HONEY EXTRACTOR 2008 32/4
 series radial for 32 honeycombs of the
 shallow box or 4 honeycombs of the
 nest, electric planner cod D20A, drain
 of the honeycombs with accumulator,
 centrifuge for operculum Kw 2,2 -230
 Volt
- **\$102** HONEY EXTRACTOR 2008 45/20 series radial for 45 honeycombs of the shallow box or 20 honeycombs of the nest
 - with electric timer, uncapping machine cod. D20A, with automatic honeycombs drain and accumulator
 - centrifuge for operculum, ripening tank with filter and preset pump's connection - Kw 2, 2 - 230 Volt

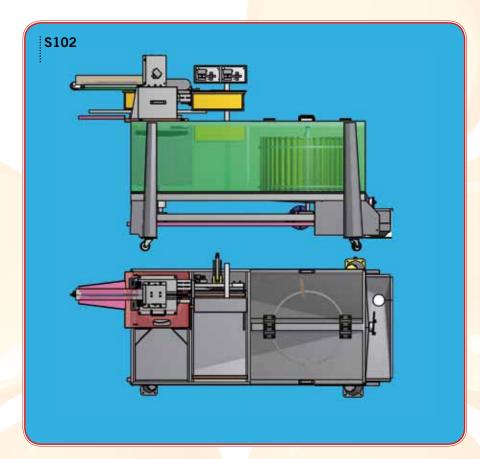

Honey extractor ROUND SERIES ϕ 370







S14I

S19I

- COD. DESCRIPTION
- **S14I** TANGENTIAL HONEY EXTRACTOR D.B. for 4 honeycombs of the shallow box or 2 honeycombs of the nest WITH inox- steel small basket Ø 370
- **S291** TANGENTIAL HONEY EXTRACTOR D.B. for 4 honeycombs of the shallow box or 2 honeycombs of the nest WITH inox- steel small basket (for the table) \emptyset 370 transmission with nylons gears.
- **S28I** TANGENTIAL LANGSTROTH HONEY EXTRACTOR D.B. for 3 honeycombs of the table WITH inox- steel small basket Ø 370 transmission with nylons gears.
- **\$191** TANGENTIAL LANGSTROTH HONEY EXTRACTOR D.B. for 3 honeycombs WITH inox- steel small basket \emptyset 370

FOR TABLE





S28I

Ø 370 C41



Honey extractors ROUN SERIES Φ 390





BASKET MEASURES mm 270X440

S112

COD. DESCRIPTION

S112 TANGENTIAL HONEY EXTRACTOR inox for 3 honeycombs with inox-steel basket - Ø 390

Honey extractors ROUND SERIES \$\phi\$ 470





COD. DESCRIPTION

S31 TANGENTIAL HONEY EXTRACTOR 2 LAYENT STAINLESS STEEL (TABLE EXTRACTOR) with inox-steel basket Ø 47

Honey extractors KIT SERIES

TECHNICAL SCHEDULE

S51 - S52 - S53 - S54 - S110 - S111


- "Free and brake tyre" transmission
- Polycarbonate transparent caps fixed with hinges.
- Transmission crosspiece and caps, both inox-steel made
- Inox-steel or nylon basket with glass fiber
- Bronze prompt-keeping' support for the tree
- Jacked up on bottom with exhaust pipe half-total
- Inox-steel all diameter filter
- Inox-steel tie (art. S51 S52 S109 S110 S111 S117 S123)
- Inox-steel ripener with faucet Cod. R11
 inox steel handle
- Inox- steel screw



- **S54** TANGENTIAL LANGSTROTH KIT honey extractor for 3 honeycombs langstroth inox-steel made basket inox-steel all diameter filter ripener of 60 kg, with inox steel handles Ø 370
- S53 TANGENTIAL D.B. KIT honey extractor for 4 honeycombs of the shallow box or 2 of the nest inox-steel made basket - inox-steel all diameter filter - ripener of 60 kg, with inox steel handles - Ø 370
- **S51** RADIAL D.B. KIT honey extractor for 9 honeycombs- inox-steel made basket inox-steel all diameter filter ripener of 90 kg, with inox steel handles Ø 470
- **S52** TANGENTIAL LANGSTROTH KIT honey extractor for 4 honeycombs inox-steel made basket inox-steel all diameter filter ripener of 90 kg, with inox steel handles Ø 470

- \$111 INOX-STEEL RADIAL D.B. LANGSTROTH KIT honey extractor for 18/3 honeycombs NYLONS made basket (cages support G06) inox-steel all diameter filter ripener of 110 kg, with inox steel handles Ø 620
- **\$110** INOX-STEEL RADIAL LANGSTROTH KIT honey extractor for 18/3 honeycombs inox-steel made basket inox-steel all diameter filter ripener of 110 kg, with inox steel handles Ø 620
- **\$109** TANGENTIAL LAYENT KIT honey extractor for 4/8 -4 honeycombs INOX-STEEL made basket inox-steel all diameter filter ripener of 110 kg, with inox steel handles Ø 620.
- **\$117** TANGENTIAL LANGSTROTH KIT honey extractor for 6 honeycombs INOX-STEEL made basket inox-steel all diameter filter ripener of 110 kg, with inox steel handles Ø 620
- **\$123** LANGSTROTH RADIAL LANGSTROTH KIT honey extractor for 12 honeycombs INOX-STEEL made basket (cages support G06) inox-steel all diameter filter ripener of 110 kg, with inox steel handles Ø 620

Honey extractor round series \$\phi\$ 525








Assembly of the motorized bar or of thee manual transmission, It happen in a fast and simply way

- **S05M** RADIAL D.B. honey extractor for 9 honeycombs of the shallow box with nylon basket supplemetary cages not included (G06 inox series) Ø 525
- **S05** RADIAL D.B. honey extractor for 9 honeycombs of the shallow box or 3 of the nest with inox-steel basket supplemetary cages not included (G08 inox series) Ø 525
- S13 TANGENTIAL D.B. honey extractor for 3 honeycombs D.B. of the NEST or 6 honeycombs of the shallow box with nylon basket Ø 525
- **S12** TANGENTIAL LAYENT honey extractor for 3 honeycombs with INOX basket Ø 525
- **S15B** TANGENTIAL LANGSTROTH honey extractor for 4 honeycombs with INOX basket Ø 525

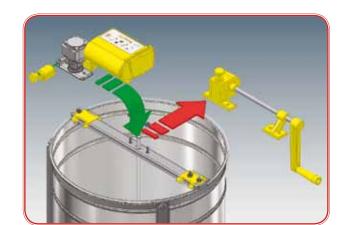






- **S86** MOTORIZED POST that can be put the honey extractor 230V 110W
- **\$122** MOTORIZED POST that can be put the honey extractor 230V 100W

Honey extractor ROUND SERIES ϕ 620

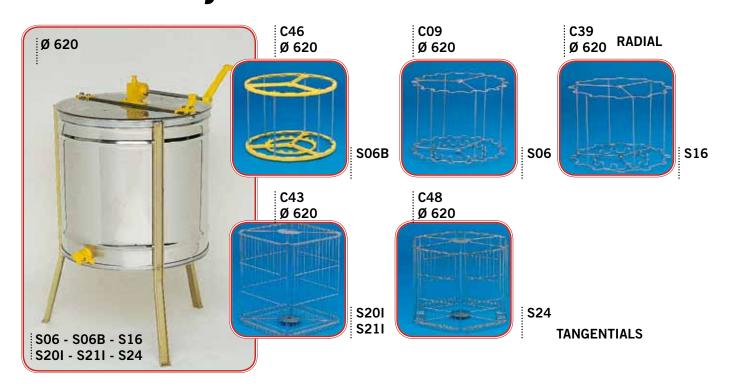

COD. DESCRIPTION

- S06 RADIAL D.B. honey extractor for 18 honeycombs of the shallow box or 3 of the nest with NYLONS basket supplemetary cages not included (G08 inox series) Ø 620
- **S06B** RADIAL D.B. honey extractor for 18 honeycombs of the shallow box or 3 of the nest with nylons basket supplemetary cages not included (G06 inox series) Ø 620
- **SOGX** RADIAL LANGSTROTH honey extractor for 9 honeycombs
- **S16** RADIAL LANGSTROTH honey extractor for 12 honeycombs with inox-steel basket Ø 620

COD. DESCRIPTION

- **S201** TANGENTIAL D.B. honey extractor for 8 honeycombs of the shallow box or 4 of the nest with inox-steel basket Ø 620
- **S211** TANGENTIAL LAYENT honey extractor for 4 honeycombs with inox-steel basket Ø 620 MANUAL
- **S24** TANGENTIAL LANGSTROTH honey extractor for 6 honeycombs with inox-steel basket Ø 620

The control panel of the engine that can be rotated as want as you want, in order to see better the commands.





TECHNICAL SCHEDULE - S66 -

ELECTRONIC HONEY EXTRACTOR

- Inox-steel honey drum, inox-steel reinforcement support's band, cut faucet Cod. R11/ R04
- Superior plank for fixing the pillow and inox-steel tree
- Basket with different choice of 4 honeycombs tang, with 18 radial honeycombs
- Transparent polycarbonate cap fixed with hinges
- Engine of 0, 37 Kw put under the trunk

- Speed Reducer applicated on the basket's tree
- Electronic planner for regulate the speed, planning of the acceleration's and deceleration's ramp and engine' stop
- Button for change the direction' sense
- Fuel supply 230 V -0.37 Kw

N.B. - possibility to change the 18 - 3 D.B. basket with an inox-steel radial 12 LANGSTROTH basket or with one of 6 F LANGSTROTH, optional supplementary G06 - G08 cages



RADIAL LAYENT honey extractor for 18 honeycombs of the shallow box or 3 of the nest electric type with inox-steel or nylons basket on demands - Ø 620

Honey extractor ROUND SERIES Ø 700





TECHNICAL SCHEDULE - S82-S91 - ELECTRONIC HONEY EXTRACTOR C €

- Inox-steel honey drum, inox-steel reinforcement support's band, cut faucet Cod.
- Tubular inox-steel legs
- Superior plank for fixing the pillow and inox-steel tree
- Cod. S82 inox-steel reversible 6 honeycombs' basket
- Cod S91 inox- steel basket with honeycombs D.B. 27 M. o 3
 N. tangential with the use of supplementary cages. 15 radial honeycombs LANGSTROTH
- Transparent polycarbonate caps fixed with hinges
- 0, 37 Kw engine put under the drum/trunk
- Speed reducer put on the basket's tree
- Electric planner with membrane panel
- Cap with security block
- Fuel supply 230 V 0.37 Kw.

- **S18B** REVERSIBLE LANGSTROTH inox-steel honey extractor for 4 honeycombs with inox steel basket Ø 700
- **S81** REVERSIBLE LANGSTROTH inox-steel honey extractor for 6 honeycombs with inox steel basket Ø 700 with motorized post cod S86 of 110W 230 volt
- **S82** REVERSIBLE LANGSTROTH inox-steel honey extractor for 6 honeycombs with inox steel basket with electric planner 230 volt 0,37 Kw Ø 700
- S91 RADIAL D.B. honey extractor for 27/3 OR15 honeycombs LANGSTROTH with inox steel basket WITH ELECTRIC PLANNER 230 volt 0,37 Kw Ø 700
- **\$107** RADIAL D.B. honey extractor for 27/3 or 15 honeycombs Langstroth with inox steel basket Ø 700 with motorized post cod \$86 of 110W 230 volt or with motorized post \$112 of 100W 230 volt

New engine for honey extractor

TECHNICAL SCHEDULE - S122 -

Built according to the demands of the more demanding beekeepers, always forced in working harder and harder and always with honey even more difficult to be extracted. High technology of microelectronics, used in the working process of the engine, allow us to introduce it in a very high level's market with different planning of its purpose.


- Electronic planning with membrane panel control
- Manual engine's use with start/stop button, speed increase/ decrease, change of the rotating sense.
- Automatic use of the engine with self-learning of the previous plannings

- Two memories where it is possible to set the extraction cycles (modifiable in extraction phases and that are automatically memorized)
- Enlighten line visualizers, start/stop, inversion, planning, used memories and speed
- Security block for the cap built-in the engine.
- fixing block for the cap when it is open
- Fast assembly at the honey extractor
- Die-cast aluminium engine's supply
- Fuel supply 230 V 100 W

the "security block" of the cap, built in the engine, it gives us the possibility to fix the cap when it is open for the loading



Assembly of the motorized bar or of the manual transmission, it happen in a fast and simply way

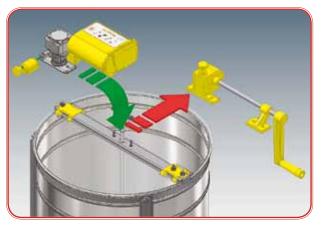

COD. DESCRIPTION

S122


\$122 MOTORIZED BAR that can be applicated on all the honey extractors - 230V - 100W

S86 MOTORIZED BAR that can be applicated on all the honey extractors - 230V - 110W

The control panel of the engine that can be rotate as required, for a better vision of the commands



Replacement part for honey extractors

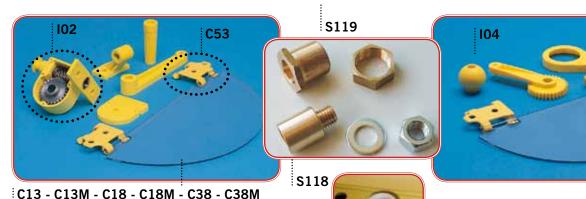





R031 - R041 - R271

NEW INOX-STEEL CUT FAUCET ONLY FOR HONEY EXTRACTORS AND **UNCAPPING MACHINE'S DESKS**



C13

COD. DESCRIPTION

- **C53** HINGE for honey extractor's each
- **C13** Polycarbonate CAP for the replacement for honey extractor Ø 370 the couple
- **C13M** Polycarbonate CAP for the replacement for honey extractor Ø 390 the couple
- **C18** Polycarbonate CAP for the replacement for honey extractor Ø 470 the couple
- **C18M** Polycarbonate CAP for the replacement for honey extractor \emptyset 525 the couple
- **C38** Polycarbonate CAP for the replacement for honey extractor Ø 620 the couple
- **C38M** Polycarbonate CAP for the replacement for honey extractor Ø 700 the couple
- 102 GEAR with 9 inox-steel rudiments for honey extractor (the couple)
- GEAR for honey extractor for the plastic table for food (the series)
- **104A** GEAR for honey extractor for the plastic and inox-steel table for food with free wheel and brake (the series)
- **T27** TRANSMISSION FOR HONEY EXTRACTOR

- TRANSMISSION FOR HONEY EXTRACTOR with brake
- **G18** VASELINE'S FAT for lubrication of the tree and gears for honey extractor, package of Kg. 1
- **R04** Chromed brass CUT FAUCAT with ferrule of Ø mm. 50 2"
- **R03** Chromed brass CUT FAUCAT with ferrule of, Ø mm, 40 1"/1/2
- **R05** Nylons CUT FAUCAT Ø mm. 40 1"/1/2 inox-steel screws
- R11 Nylons CUT FAUCAT Ø mm. 40 with ferrule, inox-steel screws
- Butterfly FAUCET inox-steel made Ø 50 mm
- Chromed SPHERE FAUCET with beak of 1/2" as container for oil and wine
- **\$118** Brass support for tree Ø 16 mm
- **\$119** Brass support for tree Ø 16 mm all filet
- **B12** Teflon journal box for the honey extractor's crossbeam.
- RO31 Inox-steel CUT FAUCET Ø mm 40 1"/1/2.
- R04I Inox-steel CUT FAUCET Ø mm 50 2"
- R271 Inox-steel CUT FAUCET Ø mm 84 3"

Honey extractor ROUND SERIES Ø 750





COD. DESCRIPTION

S37 RADIAL 32 shallow box's honeycombs HONEY EXTRACTOR or 4 from the nest - Ø 750

TECHNICAL SCHEDULE - S37 -

MIXER'S TECNIC C€

- Inox-steel trunk depth 1mm, tig welding, double reinforcement band inox-steel made, bottom with total exhaust pipe and cut sleeve for sink Ø 50, flowered or inox-steel finishing (based on availability)
- Inner led light
- Superior plank for fixing the pillow and inox-steel tree
- 3 inox-steel legs
- 32 shallow box' honey combs inox-steel basket or 4 honeycombs from the nest D B
- Caps, one is transparent and polycarbonate made and the other inox-steel made, jointed with inox-steel hinges
- Cap' security block
- Inox-steel supports of the engine
- 0.37 Kw engine put under the trunk/drum
- Speed reducer put on the basket's tree
- Electronic planner with membrane panel
- Fuel supply 230 V 0.37Kw

Honey extractors ROUND SERIES Ø 920



COD. DESCRIPTION

S83H REVERSIBLE HOBBY honey extractor of 6 honeycombs UNIVERSAL with inox steel basket Ø 920 engine cod. S86 of 230V 110W

S83P REVERSIBLE PROFESSIONAL honey extractor of 6 honeycombs UNIVERSAL with inox-steel basket Ø 920 with engine of 230V 0,37 Kw



TECHNICAL SCHEDULE - S83P - HONEY EXTRACTORS

- Inox-steel trunk with superior inox-steel reinforcement band inoxsteel screw
- Legs, legs' reinforcement, engine' supply, crossbeam in order to fix the tubular inox-steel caps
- 230 V 0.37 Kw engine- put on the trunk, reducer directly put in the basket's tree.
- Electronic control the centrifuge's phases with "membrane" panel
- Cap security block
- Openable inox-steel cap, fixed polycarbonate cap

45 honeycombs' honey extractor with frontal exhaust PIPE Ø 920 2013 series



TECHNICAL SCHEDULE - S17I -

SERIES RADIAL HONEY EXTRACTOR
FOR 45 HONEYCOMBS' SHALLOW BOX OR 20
HONEYCOMBS FOR THE NEST

- Opening of the cap with drain/load zone perfect for use 2 operator at the same moment.
- Inner led light
- Polycarbonate porthole
- better machine' stability
- Management of an automatic honey extraction with electronic control
- Honey gathering tank in the inner part of the honey extractor whose max capability is 200 kg
- Predisposition to direct joint to the honey 2" (50 mm) pump
- Bottom with forward total drain
- Steel machine AISI 304-18/10 in compliance to the low UNI6900 D.M.21.3.1973
- 230V 0,75Kw fuel supply



Honey's exit in the front part, total exhaust pipe possible pump connection to the honey extractor

COD. DESCRIPTION

\$17I RADIAL HONEY EXTRACTOR 45 honeycombs of the shallow box or 20 of the nest - \emptyset 920

Inox steel basket with spacer for honeycombs cut proof and rounded



Honey extractor ROUND SERIES ϕ 1300



TECHNICAL SCHEDULE - S34 - C6

- Inox-steel trunk depth 1mm, flowered or galzed inox-steel finishing (based on availability)
- Total drain, reinforcement inox-steel bands
- direct honey drain without the help of the sink
- 4 inox-steel legs
- Double superior plank for fixing the pillow and inox-steel tree

S34

 Inox-steel basket - loading capability with 60 shallow box honeycombs or 30 nest's honeycombs D.B.

S84

- Inox- steel basket with 12 Layton load or 12 honeycombs capability. Nest or 24 shallow box's honeycombs.
- 3 opening points in the cap.
- 1,5Hp engine put under the trunk (inox-steel engine' supplies)
- Speed reducer applicated in the basket's tree.
- Electronic planning with control membrane panel
- Engine's block
- Security blocks at the caps
- Inox-steel panel support (optional)
- Weight of the empty machine Kg 175
- Fuel supply 230 V 1 Kw.

COD. DESCRIPTION

- **S34** RADIAL HONEY EXTRACTOR for 60 honeycombs of the shallow box or 30 honeycombs of the nest Ø 1300 1 Kw w 230 Volt
- S84 REVERSIBLE D.B. HONEY EXTRACTOR for 24 honeycombs of the shallow box or 12 LAYENT honeycombs of the nest Ø 1300 - 1 Kw - w 230 Volt- Ø 1300 - 0.75 Kw - w 230 Volt

Honey extractor ROUND SERIES ϕ 1600



TECHNICAL SCHEDULE - S55/S85 - CE

- Inox-steel truck depth 1mm flowered or galzed inox-steel finishing (based on availability), inox-steel reinforced bands
- Total drain with sleeve of "faucet excluded (cod. R27I)
- 4 inox-steel legs
- Double superior plank for fixing the pillow and inox-steel tree

S55

 Radial inox-steel basket - 73 shallow box loading or 40 nest's honeycomb D.B capability

S85

- Reversible inox-steel basket loading capability with 15 nest's honeycombs D.B. or 15 Layens honeycombs
- 4 opening points in the cap
- 1.5 Kw engine put under the trunk (the supports of the engine are made with inox-steel)
- Speed reducer put on the basket's tree
- Electronic planning with membrane control panel
- Engine block
- Security blocks at the caps
- Inox-steel panel supply (optional)
- Weight's empty machine Kg 220
- Fuel supply 230 V. 1.5 Kw.

- **S55** RADIAL D.B. HONEY EXTRACTOR for 73 honeycombs of the shallow box 230 V. 1.5 Kw. Ø 1600
- S85 Reversible D.B. honey extractor of 15 honeycombs of the nest or 30 of the shallow box or 15 layent honeycombs Ø 1600 230 V. 1.5 Kw. Ø 1600

Ripening gathering tanks





Control panel for 2002 tank



TECHNICAL SCHEDULE - V02 - V03 -

- Inox-steel drilling metal sheet Prefilter for honey, with loading handles
- Movable paretie with inox-steel filter whose diameter can change.
- Water's level / water's drain
- Connection for "garolla" pump Ø 50 complete of: embellishment - dike- hose/ rubber holder
- Catch basin for gathering the honey on the bottom
- Control panel with: On/Off thermostat thermometer LCD
- Completely made with inox-steel, tog welding
- Inox-steel heated up element of 1500 W



- COD. DESCRIPTION
- Ripening tank and honey filtering totally warmed up with water double wall - cm. 127x50x26,5 - 230 V - 1500W.
- Fishing tank and honey filtering 2013 series with pump connection and total drain - cm 92x52 x h. 23 V21 fishing tank with pump connection \emptyset 50 mm to joint with the honey extractor.
- Fishing tank with ø50 mm pump connection to match to the honey extractor




TECHNICAL SCHEDULE - V21 -

- Movable paretie with inox-steel filter
- Connection for "garolla" pump Ø 50 complete of: embellishment - dike - hose/ rubber holder
- Catch basin for gathering the honey on the
- Completely made with inox-steel, tog welding
- Inox-steel drilling metal sheet Prefilter for honey, with loading handle








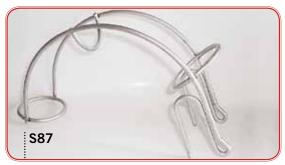



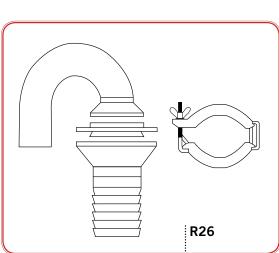

- **P20** Honey ANTIEMULSIONE PUMP speed regulation with invetr with cart and connections
- **P02** Inox-steel PUMP for honey only body with with connection of 2"
- P01 Inox-steel PUMP for mono-phase honey 230 volt with connection of 2"
- PO8 Inox-steel PUMP for three-phase honey 380 volt with connection of 2"
- **P12** PUMP for mono-phase honey with screws without finishment with connection of 2".
- **S87** TUBE'S SUPPORT of \emptyset 50 built inox-steel thread to directly put on the side of the container.
- **R26** "U" inox-steel CONNECTION for pump with hook alloy filter, rubber door connection and garolla \emptyset 50
- P16 Connection to be welded a garolla Ø 50
- P14 Embellishment for garolla Ø 50
- **P13** Rain for connection to the garolla \emptyset 50
- **P18** Connection Ø 50 with con tronchetto da 2" filettato
- P15 Garolla rubbertray Ø 50
- **T36** Food-plastic tube reinforced Ø 50mm at metre

